

FORM PTO-1390 REV. 2011		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 08364.0033
<b>TRANSMITTAL LETTER TO THE UNITED STATES          DESIGNATED/ELECTED OFFICE (DO/EO/US)          CONCERNING A FILING UNDER 35 U.S.C. 371</b>			U.S. APPLICATION NO. (If known, see 37CFR1.5) <b>10/030357</b>
INTERNATIONAL APPLICATION NO. PCT/GB00/02633	INTERNATIONAL FILING DATE July 10, 2000	PRIORITY DATE CLAIMED July 8, 1999	
TITLE OF INVENTION SIGNALLING SYSTEM			
APPLICANT(S) FOR DO/EO/US Alan Edward GREEN and Euan MORRISON			
Applicant(s) herewith submit(s) to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
1.	<input checked="" type="checkbox"/>	This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.	
2.	<input type="checkbox"/>	This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.	
3.	<input type="checkbox"/>	This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.	
4.	<input checked="" type="checkbox"/>	The US has been elected by the expiration of 19 months from the priority date (Article 31).	
5.	<input checked="" type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371 (c)(2)).	
	a.	<input checked="" type="checkbox"/>	is attached hereto (required only if not communicated by the International Bureau.
	b.	<input checked="" type="checkbox"/>	has been communicated by the International Bureau.
	c.	<input type="checkbox"/>	is not required, as the application was filed with the United States Receiving Office (RO/US).
6.	<input type="checkbox"/>	An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).	
	a.	<input type="checkbox"/>	is attached hereto.
	b.	<input type="checkbox"/>	has been previously submitted under 35 U.S.C. 154 (d)(4).
7.	<input checked="" type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)).	
	a.	<input type="checkbox"/>	are attached hereto (required only if not communicated by the International Bureau).
	b.	<input type="checkbox"/>	have been communicated by the International Bureau.
	c.	<input type="checkbox"/>	have not been made; however, the time limit for making such amendments has NOT expired.
	d.	<input checked="" type="checkbox"/>	have not been made and will not be made.
8.	<input type="checkbox"/>	An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).	
9.	<input type="checkbox"/>	An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).	
10.	<input type="checkbox"/>	An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).	
Items 11 to 20 below concern document(s) or information included:			
11.	<input checked="" type="checkbox"/>	Information Disclosure Statement under 37 CFR 1.97 and 1.98	
12.	<input type="checkbox"/>	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.	
13.	<input checked="" type="checkbox"/>	A FIRST preliminary amendment.	
14.	<input type="checkbox"/>	A SECOND or SUBSEQUENT preliminary amendment.	
15.	<input type="checkbox"/>	A Substitute specification.	
16.	<input type="checkbox"/>	A change of power of attorney and/or address letter.	
17.	<input type="checkbox"/>	A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.	
18.	<input type="checkbox"/>	A second copy of the published international application under 35 U.S.C. 154 (d)(4).	
19.	<input type="checkbox"/>	A second copy of the English language translation of the international application 35 U.S.C. 154 (d)(4).	
20.	<input checked="" type="checkbox"/>	Other items or information:	
	a.	<input checked="" type="checkbox"/>	Copy of cover page of International Publication No. WO 01/05072
	b.	<input type="checkbox"/>	Copy of Notification of Missing Requirements.
	c.	<input type="checkbox"/>	

DATED: January 8, 2002

10/030357

JC10 Rec'd FCT/PTO 08 JAN 2002

PATENT

Attorney Docket No. 08364.0033  
CUSTOMER NUMBER 22,852

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Inventor: Alan Edward GREEN et al.

Serial No.: Not Yet Assigned

Filed: January 8, 2002

U.S. National Phase Application No.  
PCT/GB00/02633

For: SIGNALLING SYSTEM

Group Art Unit: Not assigned

Examiner: Not assigned

**BOX PCT**

**Assistant Commissioner for Patents  
Washington, DC 20231**

Sir:

**PRELIMINARY AMENDMENT**

Prior to examination, please amend the above-identified application  
as follows:

**IN THE SPECIFICATION:**

Please amend the specification as follows:

Page 1, after the title insert a new paragraph as follows:

**--CROSS REFERENCE TO RELATED APPLICATIONS**

This application is national phase application based on International  
Application Number PCT/GB00/02633, filed on July 10, 2000, and claims

FINNEGAN  
HENDERSON  
FARABOW  
GARRETT &  
DUNNER LLP

1300 I Street, NW  
Washington, DC 20005  
202.408.4000  
Fax 202.408.4400  
www.finnegan.com

the priority of Great Britain Patent Application No. 9916081.4, filed July 8, 1999 and Great Britain Patent Application No. 9916082.2, filed July 8, 1999.--

**IN THE CLAIMS:**

Please cancel claims 1 - 46 without prejudice or disclaimer and substitute pending claims 47 - 114 therefor as follows:

47. (New) An optical signalling system comprising first and second signalling devices,

the first signalling device comprising a first receiver operable to receive an optical signal transmitted from said second signalling device; and a modulator operable to modulate the received optical signal with modulation data for the second signalling device and to reflect the received signal back to the second signalling device; and

the second signalling device comprising: a second receiver operable to receive the reflected optical signal from said first signalling device carrying said modulation data; a data retriever operable to retrieve the modulation data from said reflected signal; a signal generator operable to generate an optical signal; a steerer operable to controllably steer the optical signal generated by said signal generator towards said first signalling device; a sensor operable to sense the signal strength of the reflected optical signal; and a controller operable to control said steerer in dependence upon the sensed signal strength.

48. (New) A system according to claim 47, wherein said steerer comprises a reflector operable to reflect said optical signal.

49. (New) A system according to claim 48, wherein said steerer comprises one or more mirrors pivotally mounted relative to said generated optical signal.

50. (New) A system according to claim 47, wherein said steerer comprises a diffractive element operable to diffract said generated optical signal.

51. (New) A system according to claim 50, wherein said diffractive element comprises a moving diffraction grating.

52. (New) A system according to claim 50, wherein said diffractive element comprises a hologram.

53. (New) A system according to claim 52, wherein said hologram is movable relative to the generated optical signal.

54. (New) A system according to claim 47, wherein said steerer comprises a refractive element operable to refract the generated optical signal.



2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808 2809 2810 2811 2812 2813 2814 2815 2816 2817 2

INNEGAN  
ENDERSON  
ARABOW  
ARRETT &  
JUNNER LLP

1300 I Street, NW  
Washington, DC 20005  
202.408.4000  
Fax 202.408.4400  
[www.finnegan.com](http://www.finnegan.com)

64. (New) A system according to claim 47, wherein said signal generator is operable to generate an optical signal at a first power level and wherein said second signalling device further comprises a power controller operable to reduce the power output of said signal generator to a second power level in dependence upon the signal level of said reflected signal sensed by said sensor.

65. (New) A system according to claim 64, wherein said sensor is operable to monitor a recent history of the received signal level and wherein said power controller is operable to reduce the power output of said signal generator in dependence upon said recent history.

66. (New) A system according to claim 65, wherein said sensor is operable to sense the level of the reflected signal at regular intervals and wherein said power controller is operable to reduce the power output of said signal generator if the change in signal level between sensing intervals exceeds a predetermined threshold.

67. (New) A system according to claim 47, wherein said controller comprises one or more stepper motors for controlling said steerer.

68. (New) A system according to claim 47, wherein said first signalling device further comprises a focussing device operable to focus the received optical signal onto said reflector.

69. (New) A system according to claim 68, wherein said focussing device comprises a telecentric lens and wherein said reflector is located substantially at the focal plane of said telecentric lens.

70. (New) A system according to claim 69, wherein said telecentric lens is a wide angled telecentric lens.

71. (New) A system according to claim 68, wherein said modulator is transmissive and is located between said focussing device and said reflector.



72. (New) A system according to claim 47, wherein said modulator and said reflector are co-located.

73. (New) A system according to claim 47, wherein said modulator and said reflector are separate elements.

74. (New) A system according to claim 47, wherein said first signalling device comprises a plurality of modulators operable to modulate and reflect optical signals received from a plurality of second signalling devices.

75. (New) A system according to claim 74, wherein said plurality of modulators are arranged in an array.

76. (New) A system according to claim 75, wherein said plurality of modulators are arranged in a regular array.

77. (New) A system according to claim 75, wherein said plurality of modulators are arranged in a two dimensional array.

78. (New) A system according to claim 47, wherein said reflector comprises a retro-reflector.

79. (New) A system according to claim 47, wherein said modulator is operable to modulate at least one of the amplitude, phase, frequency and polarisation of the received signal.

80. (New) A system according to claim 47, wherein said modulator comprises a quantum confined stark effect device.

81. (New) A system according to claim 47, wherein said second signalling device is operable to transmit a message to said first signalling device and wherein said first signalling device comprises an information retriever operable to retrieve the message from the received signal.

82. (New) A system according to claim 47, wherein said signal generator comprises at least one of a laser, a laser diode and a light emitting diode.

83. (New) A system according to claim 47, wherein said second signalling device further comprises an optical beam expander for increasing the diameter of the optical signal output towards said first signalling device.

84. (New) A signalling device comprising:  
a signal generator operable to generate an optical signal;  
a receiver operable to receive an optical signal carrying modulation data from a remote signalling device;

a data retriever operable to retrieve the modulation data from said reflected signal;

a steerer operable to controllably steer the optical signal generated by said signal generator towards said remote signalling device;

a sensor operable to sense the signal strength of the received optical signal; and

a controller operable to control said steering means in dependence upon the sensed signal strength.

85. (New) A signalling device according to claim 84, wherein said steerer comprises a reflector operable to reflect said optical signal.

86. (New) A signalling device according to claim 85, wherein said steerer comprises one or more mirrors pivotally mounted relative to said generated optical signal.

87. (New) A signalling device according to claim 84, wherein said steerer comprises a diffractive element operable to diffract said generated optical signal.

88. (New) A signalling device according to claim 87, wherein said diffractive element comprises a moving diffraction grating.

89. (New) A signalling device according to claim 88, wherein said diffractive element comprises a hologram.

90. (New) A signally device according to claim 89, wherein said hologram is movable relative to the generated optical signal.

91. (New) A signalling device according to claim 84, wherein said steerer comprises a refractive element operable to refract the generated optical signal.

92. (New) A signally device according to claim 91, wherein said refractive element comprises a first and second prism.

93. (New) A signalling device according to claim 92, wherein said steerer is operable to steer said generated optical signal by rotating said prisms relative to said generated optical signal.

94. (New) A signalling device according to claim 93, wherein said first and second prisms are rotatable about the axis of the generated optical signal and wherein said steerer is operable to rotate the two prisms in opposite directions to steer the generated optical signal in a first direction and is operable to rotate the first and second prisms in the same direction to steer the generated optical signal in a second direction different to the first direction.

95. (New) A signalling device according to claim 92, wherein said first and second prisms are wedge shaped.



operable to reduce the power output of said signal generator to a second power level in dependence upon the signal level of said reflected signal sensed by said sensor.

102. (New) A signalling device according to claim 101, wherein said sensor is operable to monitor a recent history of the received signal level and wherein said power controller is operable to reduce the power output of said signal generator in dependence upon said recent history.

103. (New) A signalling device according to claim 102, wherein said sensor is operable to sense the level of the reflected signal at regular intervals and wherein said power controller is operable to reduce the power output of said signal generator if the change in signal level between sensing intervals exceeds a predetermined threshold.

104. (New) A signalling device according to claim 84, wherein said controller comprises at least one stepper motor for controlling said steerer.

105. (New) A signalling device according to claim 84, wherein said signal generator comprises at least one of a laser, a laser diode and a light emitting diode.

106. (New) A signalling device according to claim 84, further comprising an optical beam expander for increasing the diameter of the optical signal output towards the remote signalling device.

107. (New) A signalling kit comprising one or more first signalling devices and one or more second signalling devices, wherein each of said second signalling devices comprises a signalling device according to claim 84.

108. (New) An optical signalling method using first and second signalling devices, the method comprising:

at the first signalling device: receiving an optical signal transmitted from said second signalling device; modulating the received optical signal with modulation data for the second signalling device; and reflecting the received signal back to the second signalling device; and

at the second signalling device: generating an optical signal; outputting the optical signal towards said first signalling device; receiving the reflected optical signal from said first signalling device carrying said modulation data; and retrieving the modulation data from said reflected signal;

wherein at the second signalling device the outputting of the generated optical signal comprises:

controllably steering the generated optical signal towards said first signalling device;

sensing the signal strength of the reflected signal; and

controlling said steering step in dependence upon the sensed signal strength.

109. (New) A retro-reflecting optical communications system comprising an optical source end and a reflecting end, wherein the source end comprises:

a steerer operable to controllably steer a generated optical signal towards said reflecting end;

a sensor operable to sense the signal strength of a reflected signal received back from said reflecting end; and

a controller operable to control said steerer in dependence upon the sensed signal strength.

110. (New) An optical signalling system comprising first and second signalling devices,

the first signalling device comprising: a first receiver operable to receive an optical signal transmitted from said second signalling device; a modulator operable to modulate the received optical signal with modulation data for the second signalling device; and a reflector operable to reflect the received signal back to the second signalling device; and

the second signalling device comprising: a second receiver operable to receive the reflected optical signal from said first signalling device carrying said modulation data; a data retriever operable to retrieve the modulation data from said reflected signal; a signal generator operable to generate an optical signal at a first power level; a sensor operable to sense the signal strength of the reflected signal; and a power controller operable to reduce the power output of said signal generator to a second



power level lower than the first power level in dependence upon the sensed signal strength.

111. (New) A system according to claim 110, wherein said sensor is operable to monitor a recent history of the received signal level and wherein said power controller is operable to reduce the power output of said signal generator in dependence upon said recent history.

112. (New) A system according to claim 111, wherein said sensor is operable to sense the level of the reflected signal at regular intervals and wherein said power controller is operable to reduce the power output of said signal generator if the change in signal level between sensing intervals exceeds a predetermined threshold.

113. (New) A data distribution system comprising at least one signalling system according to claim 47.

114. (New) A data distribution system comprising at least one signalling system according to claim 110.

FINNEGAN  
HENDERSON  
FARABOW  
GARRETT &  
DUNNER LLP

1300 I Street, NW  
Washington, DC 20005  
202.408.4000  
Fax 202.408.4400  
www.finnegan.com

**REMARKS**

The claims have been amended to eliminate multiple claim dependency and to conform them to U.S. practice. No new matter has been introduced by these amendments.

The examiner is respectfully requested to consider the above preliminary amendment prior to examination of the application.

If there are any fees due in connection with the filing of this amendment, please charge the fees to Deposit Account No. 06-0916. If a fee is required for an extension of time under 37 C.F.R. § 1.136 not accounted for above, such an extension is requested and the fee should also be charged to our deposit account.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,  
GARRETT & DUNNER, L.L.P.

Dated: January 8, 2002

By:   
Ernest F. Chapman  
Reg. No. 25,961

EFC/FPD/dvz

FINNEGAN  
HENDERSON  
FARABOW  
GARRETT &  
DUNNER LLP

1300 I Street, NW  
Washington, DC 20005  
202.408.4000  
Fax 202.408.4400  
www.finnegan.com

SIGNALLING SYSTEM

The present invention relates to a signalling system. The invention has particular, although not exclusive, relevance to the alignment of an optical beam used in an optical communication system.

The applicant has proposed in their earlier International application WO 98/35328 a point to multipoint data transmission system which uses a retro-reflector to receive collimated laser beams from a plurality of user terminals, to modulate the received laser beams and to reflect them back to the respective user terminals. This point to multipoint data transmission system employs pixelated reflector/modulator arrays and a telecentric optical lens system. Each pixel in the array maps to a unique angular position in the field of view of the telecentric optical lens system. Communications with each of the user terminals is then achieved using the appropriate pixel in the array which maps to the direction in which the user terminal is located within the field of view.

In conventional free-space optical communication systems, a relatively divergent laser beam is used in order to ease alignment during installation and to allow the ends of the link to move over time and still maintain the link. However, the system described in the applicants earlier International application described above has the

disadvantage that the collection aperture at the modulator end is limited (by the telecentric lens) and the light undergoes twice the atmospheric loss due the retro-reflective nature of the system. It is possible to overcome the limitation of the telecentric aperture size by transmitting a beam with significantly lower divergence (down to the diffraction limit) over the ranges considered (approximately 200m). However, the use of such a narrow beam results in the problem that the user terminals must be accurately aligned with the retro-reflector and the problem that the system is sensitive to vibration or creepage of either end of the communication link.

The present invention aims to provide an alternative technique for maintaining alignment between the laser beam transmitted by the receiving end of the system towards the retro-reflector.

Exemplary embodiments of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a schematic diagram of a video broadcast system for supplying video signals for a plurality of television channels, to a plurality of remote users;

Figure 2 is a schematic block diagram of a local distribution node and a user terminal which forms part of

the video broadcast system shown in Figure 1;

Figure 3 is a schematic diagram of a retro-reflector array and lens system employed in the local distribution node shown in Figure 2;

Figure 4 is a schematic diagram of a pixelated modulator array forming part of the retro-reflecting modulator unit shown in Figure 3;

Figure 5 is a perspective schematic view of the components in the user terminal which forms part of the system shown in Figure 3;

Figure 6 is a plot illustrating the intensity profile of the laser beam generated by the user terminal shown in Figure 5;

Figure 7 is a block diagram illustrating a control circuit which forms part of the user terminal shown in Figure 5; and

Figure 8 is a perspective schematic view of an alternative user terminal which may be used in the system shown in Figure 3.

Figure 1 schematically illustrates a video broadcast system for supplying video signals, for a plurality of television channels, to a plurality of remote users. As

shown in Figure 1, the system comprises a central distribution system 1 which transmits optical video signals to a plurality of local distribution nodes 3 via a bundle of optical fibres 5. The local distribution nodes 3 are arranged to receive the optical video signals transmitted from the central distribution system 1 and to transmit relevant parts of the video signals to respective user terminals 7 (which are spatially fixed relative to the local distribution node 3) as optical signals through free space, i.e. not as optical signals along an optical fibre path.

In this embodiment, the video data for all the available television channels is transmitted from the central distribution system 1 to each of the local distribution nodes 3, each user terminal 7 informs the appropriate local distribution node 3 which channel or channels it wishes to receive (by transmitting an appropriate request) and, in response, the local distribution node 3 transmits the appropriate video data, to the respective user terminals 7. Each local distribution node 3 does not, however, broadcast the video data to the respective user terminals 7. Instead, each local distribution node 3 is arranged (i) to receive an optical beam transmitted from each of the user terminals 7 which are in its locality, (ii) to modulate the received beams with the appropriate video data for the desired channel or channels, and (iii) to reflect the modulated beams back to the respective user terminals 7. In addition to being

able to receive optical signals from the central distribution system 1 and from the user terminal 7, each of the local distribution nodes 3 can also transmit optical data, such as status reports, back to the central distribution system 1 via the respective optical fibre bundle 5, so that the central distribution system 1 can monitor the status of the distribution network.

Figure 2 schematically illustrates in more detail the main components of one of the local distribution nodes 3 and one of the user terminals 7 of the system shown in Figure 1. As shown in Figure 2, the local distribution node 3 comprises a communications control unit 11 which (i) receives the optical signals transmitted along the optical fibre bundle 5 from the central distribution system 1; (ii) regenerates the video data from the received optical signals; (iii) receives messages 12 transmitted from the user terminals 7 and takes appropriate action in response thereto; and (iv) converts the appropriate video data into data 14 for modulating the respective light beams 15 received from the user terminals 7. In converting the video data into modulation data 14, the communications control unit 11 will encode the video data with error correction coding and coding to reduce the effects of inter-symbol-interference and other kinds of well known sources of interference such as from the sun and other light sources.

The local distribution node 3 also comprises a retro-reflector and modem unit 13, which is arranged to receive the optical beams 15 from the user terminals 7 which are within its field of view, to modulate the respective light beams with the appropriate modulation data 14 and to reflect the modulated beams back to the respective user terminals 7. In the event that an optical beam 15 received from one of the user terminals 7 carries a message 12, then the retro-reflector and modem unit 13 retrieves the message 12 and sends it to the communications control unit 11 where it is processed and the appropriate action is taken. In this embodiment, the retro-reflector and modem unit 13 has a horizontal field of view which is greater than  $\pm 50^\circ$  and a vertical field of view of approximately  $\pm 5^\circ$ .

Figure 2 also shows the main components of one of the user terminals 7. As shown, the user terminal 7 comprises a laser diode 17 for outputting a laser beam 19 of coherent light. In this embodiment, the user terminals 7 are designed so that they can communicate with the local distribution node 3 within a range of approximately 200 metres with a link availability of 99.9 per cent. To achieve this, the laser diode 17 is a 150 mW laser diode which outputs a laser beam having a wavelength of 850 nm. Although this is well above the operating limit which is classified as eye safe, this embodiment makes use of the fact that if the laser beam is interrupted by a person, then this will be detectable



at the receiver (since such an interruption of the beam causes an almost instantaneous drop in received signal level) and hence in this situation, the power output of the laser can be reduced to safe levels.

5 As shown in Figure 2, the output laser beam 19 is passed through a collimator 21 which reduces the angle of divergence of the laser beam 19. The resulting laser beam 23 is passed through a beamsplitter 25 to a pair of steerable mirrors 26 which are used to steer the laser beam. The laser beam then passes through an optical beam expander 27, which increases the diameter of the laser beam to approximately 50 mm for transmittal to the retro-reflector and modem unit 13 located in the local distribution node 3. The optical beam expander 27 is used because a large diameter laser beam has a smaller divergence than a small diameter laser beam.

Using the optical beam expander 27 has the further advantage that it provides a fairly large collecting aperture for the reflected laser beam and it concentrates the reflected laser beam into a smaller diameter beam. The smaller diameter reflected beam is then split from the path of the originally transmitted laser beam by the beamsplitter 25 and focussed onto a photo-diode 29 by a lens 31. Since the operating wavelength of the laser diode 17 is 850nm, a silicon avalanche photo-diode (APD) can be used, which is generally more sensitive than other commercially available photo detectors, because of the low noise multiplication which can be achieved with these

devices. The electrical signals output by the photo-diode 29, which will vary in dependence upon the modulation data 14, are then amplified by the amplifier 33 and filtered by the filter 35. The filtered signals  
5 are then supplied to a control unit 37 which regenerates the clock and the video data using standard data processing techniques. The retrieved video data 38 is then passed to the user unit 39, which, in this embodiment, comprises a television receiver in which the video data is displayed to the user on a CRT (not shown).  
10

The control unit 37 is also used to control the steering of the steerable mirrors 26 so that the laser beam is optimally aligned with the local distribution node 3. The control unit 37 also monitors and keeps a history of the recent signal strength so that, if the beam is interrupted, it can pass a control signal to the laser control unit 41 so that the power of the laser diode 17 is reduced to a class 1 level (0.25mW). Provided this  
15 power reduction can be achieved within one millisecond of the beam being interrupted, this would provide a system which could be considered as class 1 eye safe. As those skilled in the art will appreciate, by monitoring the recent history of the received signal strength, the  
20 control unit 37 can distinguish between slowly varying signal levels (caused for example by deteriorating atmospheric conditions) and sudden interruptions caused by, for example, a person interrupting the beam.  
25

In this embodiment, the user unit 39 can receive an input from the user, for example indicating the selection of a desired television channel, via a remote control unit (not shown). In response, the user unit 39 generates an appropriate message 12 for transmittal to the local distribution node 3. This message 12 is output to the laser control unit 41 which controls the laser diode 17 so as to cause the laser beam 19 output from the laser diode 17 to be modulated with the message 12. As those skilled in art will appreciate, in order that the data being transmitted in opposite directions do not interfere with each other, different modulation techniques should be employed. For example, if the amplitude of the laser beam 15 is modulated by the local distribution node 3, then the laser control unit 41 should modulate, for example, the phase of the transmitted laser beam. Alternatively, the laser control unit 41 could apply a small signal modulation to the laser beam 19 to create a low-bandwidth control channel between the user terminal 7 and the local distribution node 3. This is possible provided the detector in the local distribution node 3 can detect the small variation in the amplitude of the received laser beam. Furthermore, such a small signal amplitude modulation of the laser beam would not affect a binary "on" and "off" type modulation which could be employed by the retro-reflector and modem unit 13.

The structure and function of most of the components in the user terminal 7 are well known to those skilled in

the art and a more detailed description of them shall, therefore, be omitted. However, a more detailed description of the steerable mirrors 26 and the control unit 37 will be given later.

Figure 3 schematically illustrates the retro-reflector and modem unit 13 which forms part of the local distribution node 3 shown in Figure 2. As shown, in this embodiment, the retro-reflector and modem unit 13 comprises a wide angle telecentric lens system 51 and an array of modulators and detectors 53. The design of such a wide angle telecentric lens using fisheye lens techniques is well known to those skilled in the art. In this embodiment, the telecentric lens 51 comprises lens elements 61 and 55 and a stop member 57, having a central aperture 59. The size of the aperture 59 is a design choice and depends upon the particular requirements of the installation. The structure and function of the telecentric lens system is described in the applicants earlier International application WO 98/35328, the contents of which are incorporated herein by reference.

As illustrated in Figure 3 by the two sets of rays 67 and 69, laser beams from different sources are focussed onto different parts of the array of modulators and detectors 53. Therefore, by using an array of separate modulators and detectors, the laser beams 15 from all the user terminals 7 can be separately detected and modulated by

11

a respective modulator and detector pair. Figure 4 is a schematic representation of the front surface (i.e. the surface facing the lens system 51) of the modulator and detector array 53 which, in this embodiment, comprises 100 columns of modulator/detector cells and 10 rows of modulator/detector cells (not all of which are shown in the figure). Each modulator/detector cell  $c_{ij}$  comprises a modulator  $m_{ij}$  and a detector  $d_{ij}$  located adjacent the corresponding modulator. In this embodiment, the size 71 of the cells  $c_{ij}$  is between 50 and 200  $\mu\text{m}$ , with the spacing (centre to centre) 72 between the cells being slightly greater than the cell size 71.

The telecentric lens 51 is designed so that the spot size of a focussed laser beam from one of the user terminals 7 corresponds with the size 71 of one of the modulator/detector cells  $c_{ij}$ , as illustrated by the shaded circle 73 shown in Figure 4, which covers the modulator/detector cell  $c_{22}$ .

In this embodiment, Quantum Confined Stark Effect (QCSE, sometimes also referred to as Self Electro-optic Effect Devices or SEEDs) modulators, developed by the American Telephone and Telegraph Company (AT&T), are used for the modulators  $m_{ij}$ . The structure and function of these QCSE modulators is described in WO 98/35328 and will not be given here. In this embodiment, each of the detectors  $d_{ij}$  comprises a photo-diode which is connected to an associated amplifier, filter and clock recovery and data

12

retrieval unit, which operate to detect any modulation of the corresponding laser beam and to regenerate any messages 12 which are transmitted from the corresponding user terminal 7. All the recovered messages 12 are then transmitted back to the communications control unit 11 where they are processed and appropriate actions are taken.

The way in which the laser beam is steered by the steerable mirrors 26 will now be described with reference to Figures 5 to 7. Figure 5 is a perspective schematic view of the user terminal shown in Figure 2. As shown, light from the laser diode 17 passes through a collimator lens 21 and through a beamsplitter 25 to the steerable mirrors 26-1 and 26-2. As shown, steerable mirror 26-1 is mounted for rotation on the drive shaft 81-1 of motor 83-1 and can therefore be rotated about the vertical axis 85 of the shaft 81-1. The mirror 26-1 can therefore be used to steer the laser beam horizontally. As shown in Figure 5, the laser beam reflected from the mirror 26-1 hits the mirror 26-2 which is mounted for rotation with the drive shaft 81-2 of the second motor 83-2. As shown, the drive shaft 81-2 is operable to rotate the mirror 26-2 about the horizontal axis 87. As a result, the mirror 26-2 can steer the laser beam in the vertical direction. Consequently, the combination of the two mirrors 26-1 and 26-2 can steer the laser beam in any desired direction towards the appropriate local distribution load 3. In this embodiment, the control

unit 37 controls the positions of the mirrors 26-1 and 26-2 by outputting appropriate control signals to the motors 33-1 and 33-2. In particular the control unit 37 controls the motors 83 in order to maximise the level of the signal reflected from the local distribution node 3. As those skilled in the art will appreciate, typically the laser beam generated by the laser diode 17 will be non-uniform, and in many instances will approximately have a Gaussian profile. This is illustrated in Figure 6. Therefore, there will be a number of beam positions which give the same reflected signal strength. In order that the control unit 37 can detect this and determine the correct direction in which to steer the beam for maximum strength, it uses a phase sensitive detection technique. This is achieved by applying a small amplitude oscillation to each of the two mirrors 26-1 and 26-2. The resulting small modulation in the received signal strength (due to the oscillation of the mirrors) is detected by mixing the received signal with the modulating signal applied to the motors 83-1 and 83-2 used to cause the mirrors to oscillate. This is illustrated in Figure 7.

In particular, Figure 7 shows a dither signal generator 91 which generates the modulating signals used to cause the two mirrors 26 to oscillate. In this embodiment, dither signal generator 91 generates two dither signals 93-1 and 93-2 which are passed to a motor controller 95. The motor controller 95 uses the dither signal 93-1 to

control the motor 83-1 and it uses the dither signal 93-2 to control the motor 83-2. The signal 97 output from the filter 35 (shown in Figure 2) is input to two mixers 99-1 and 99-2 where the signal is mixed with a respective one of the two dither signals 93-1 and 93-2. As those skilled in the art will appreciate, the two dither signals 93-1 and 93-2 are preferably at different frequencies which are not harmonically related, in order that there is no cross talk between the signals derived from the respective mixers 99-1 and 99-2. The outputs from the mixers 99 are then filtered by a respective low pass filter 101-1 and 101-2 to remove the high frequency components. The filtered signals are then converted into digital signals by the analogue to digital converter 103 and then passed to the microprocessor 105 for processing.

When the laser beam is accurately aligned with the retro-reflector, the system will be operating near the peak of the curve shown in Figure 6. Therefore, in this case, the small oscillations will have little effect and small amplitude signals will be received by the microprocessor 105. If, however, the laser beam is misaligned and is operating off the peak shown in Figure 6, then larger signal levels will be output from one or both of the low pass filters 101. The sign of the signal will depend upon whether the mis-alignment is to the left or to the right of the peak. Therefore, the microprocessor 105 can process the signals output by the analogue to digital



15

converter 103 and output an appropriate control signal to the motor controller 95 to cause the mirrors 26 to be adjusted so that the beam is optimally aligned with the retro-reflector.

5

Figure 7 also shows that the control unit 37 includes a clock recovery and data regeneration unit 107 which is used to regenerate the modulation data 14 sent from the local distribution node 3. As shown, this data is output to the user unit 39. Figure 7 also shows that the signal 97 is input directly to the microprocessor 105, via the analogue to digital converter 103, so that the microprocessor 105 can (i) continuously monitor the signal strength of the received beam; (ii) store, in the memory 109, the recent history of the received signal strength; and (iii) if appropriate, output a control signal to the laser control unit 41 in order to reduce the power of the transmitted laser beam.

10

15

20

25

In the above embodiment, two mirrors were mounted for rotation about orthogonal axes so that the user terminals can steer their laser beams towards the retro-reflector within the local distribution node. As those skilled in the art will appreciate, other arrangements are possible. For example, a single mirror may be used if two-axis movement is provided. Further, rather than using reflective mirrors, a similar steering operation can be achieved using refraction or diffraction techniques. An example of a diffractive technique would

be to use an acousto-optic scanner in which a surface acoustic wave is launched into a piezoelectric material, the propagation wave forming a moving diffraction grating. A laser beam incident on the piezoelectric material is then diffracted by the grating, with the angle of diffraction being related to the grating pitch, and hence to the drive frequency. The laser beam is therefore steered by variation of the drive frequency. However, this type of system is not preferred due to high cost, low efficiency and the need to provide relatively high drive frequencies (several MHz).

A second type of diffractive system is the hologon, named by analogy with the polygon reflective scanner found in laser printers. Such a system comprises a disk of transparent material (typically glass or plastic) whose surface is embossed with a computer generated hologram. The hologram is designed to deflect an incoming laser beam through an angle which depends on the position of the beam on the surface of disk. Steering of the beam is achieved by rotating the disk with respect to the incident beam. Typically, two such hologons would be required to steer the beam in two directions. Such a diffractive system has the advantages that the hologons may be mounted on stepper motors and hence only consume power during a change in beam steering; the beam deflection achieved is set in advance by design and can be chosen arbitrarily; and the hologons are cheap since they can be embossed like a CD. However, the hologon

system suffers from the disadvantage of high design and tooling costs for the hologon and low optical efficiency since some of the optical power is lost through the diffraction process.

Refractive steering of the laser beam may be achieved using two wedge prisms. Such a system is shown in Figure 8. In particular, Figure 8 shows the main components of a user terminal which employs two wedge shape prisms 109-1 and 109-2 located between the optical beam expander 27 and the beamsplitter 25. If the two prisms 109 are rotated by an equal amount but in opposite directions, the laser beam is steered in the horizontal plane. The amount of the deviation is set by the angle of rotation, the prism wedge angle and the prism refractive index. To achieve vertical deviation of the laser beam, the two prisms are rotated in the same direction, to effectively rotate the plane of deviation. Therefore, any arbitrary  $\theta$ ,  $\phi$  deviation can be achieved.

The refractive solution illustrated in Figure 8 has a number of advantages. In particular, the prism parameters can be chosen so that a full rotation of the prisms gives the full range of deviation required, thereby minimising the precision required of the rotation mechanism (not shown) used to rotate the prisms. Additionally, the prisms can be readily rotated using stepper motors which only require power during a change in the beam steering. Further, since a similar optical

system has been used since approximately 1930, to implement range finders in a number of cameras, the prisms and rotation mechanisms required are readily available and low cost items.

In the first embodiment described above, a high powered laser was used and the power output of the laser was reduced in the event of the beam being interrupted. As those skilled in the art will appreciate, the ability to be able to control the power of the laser beam in this way is applicable to any retro-reflecting communication technique, since the received signal level gives a reliable indication of the link integrity and since the laser is physically located at the receiver end, its output power can be controlled by electronics at the receiver.

In the above embodiments, an array of QCSE modulators were used in the retro-reflecting end of the communications link. These QCSE modulators either absorb or reflect incident light. As those skilled in the art will appreciate, other types of reflectors and modulators can be used. For example, a plane mirror may be used as the reflector and a transmissive modulator (such as a liquid crystal) may be provided between the lens and the mirror. Alternatively still, beamsplitters may be used to temporarily separate the path of the incoming beam from the path of the reflected beam and, in this case, the modulator may be provided in the path of the

reflected beam so that only the reflected light is modulated. However, such an embodiment is not preferred since it requires additional optical components to split the forward and return paths and then to recombine the paths after modulation has been effected.

In the above embodiment, a telecentric lens was used in front of the array of retro-reflectors. Whilst the use of a telecentric lens is preferred, it is not essential. Further, if a telecentric lens is used, the back focal plane of the lens may be curved or partially curved, in which case the array of modulators should also be curved or partially curved to match the back focal plane of the telecentric lens.

In the above embodiments, a multipoint to point signalling system has been described. As those skilled in the art will appreciate, many of the advantages of the systems described above will also apply to point to point signalling systems, to point to multipoint signalling systems and to multipoint to multipoint signalling systems.

In the above embodiment, the amplitude modulation of the signal strength caused by the oscillation of the mirrors was detected by mixing the signal with the dither signals. As those skilled in the art will appreciate, other techniques may be used. For example, the microprocessor 105 may detect the variation in the signal

20

strength from the digital samples generated from the received signal itself. The microprocessor 105 could then cause the beam to be steered in a direction and if the variation increases then it can steer the laser beam in the opposite direction.

5

10030257-050502

CLAIMS

1. An optical signalling system comprising first and second signalling devices,

5 the first signalling device comprising means for receiving an optical signal transmitted from said second signalling device; and means for modulating the received optical signal with modulation data for the second signalling device and for reflecting the received signal  
10 back to the second signalling device; and

the second signalling device comprising: means for generating an optical signal; means for outputting the optical signal toward said first signalling device; means  
15 for receiving the reflected optical signal from said first signalling device carrying said modulation data; and means for retrieving the modulation data from said reflected signal;

characterised in that said second signalling device further comprises:

20 means for controllably steering the optical signal generated by said generating means towards said first signalling device;

means for sensing the signal strength of the reflected signal; and

25 means for controlling said steering means in

dependence upon the sensed signal strength.

2. A system according to claim 1, wherein said steering means comprising means for reflecting said optical signal.

3. A system according to claim 2, wherein said steering means comprises one or mirrors pivotally mounted relative to said generated optical signal.

4. A system according to claim 1, wherein said steering means comprises means for diffracting said generated optical signal.

5. A system according to claim 4, wherein said diffraction means comprises a moving diffraction grating.

6. A system according to claim 4, wherein said diffraction means comprises a hologram.

7. A system according to claim 6, wherein said hologram is movable relative to the generated optical signal.

8. A system according to claim 1, wherein said steering means comprises means for refracting the generated



23

optical signal.

9. A system according to claim 8, wherein said refracting means comprises first and second prisms.

10. A system according to claim 9, wherein said steering means is operable to steer said generated optical signal by rotating said prisms relative to said generated optical signal.

11. A system according to claim 10, wherein said first and second prisms are rotatable about the axis of the generated optical signal and wherein said steering means is operable to rotate the two prisms in opposite directions to steer the generated optical signal in a first direction and is operable to rotate the first and second prisms in the same direction to steer the generated optical signal in a second different direction.

12. A system according to any of claims 9 to 11, wherein said first and second prisms are wedge shaped.

13. A system according to any preceding claim, wherein said sensing means is operable to monitor the signal strength of said reflected optical signal and wherein

said control means is operable to control said steering means in dependence upon the monitored signal levels.

14. A system according to any preceding claim, wherein said control means is operable to oscillate said steering means, wherein said sensing means is operable to sense a variation in the signal strength caused by said oscillation and wherein said control means is operable to control said steering means in dependence upon the sensed variation.

15. A system according to claim 14, wherein said sensing means comprises a phase sensitive amplitude modulation detecting means.

16. A system according to claim 15, wherein said control means is operable to oscillate said steering means in accordance with at least one dither signal and wherein said detecting means comprises means for mixing said reflected signal with the at least one dither signal.

17. A system according to any preceding claim, wherein said control means comprises a microprocessor.

18. A system according to any preceding claim, wherein

25

said generating means is operable to generate an optical signal at a first power level and wherein said second signalling device further comprises power control means for reducing the power output of said generating means to a second power level in dependence upon the signal level of said reflected signal sensed by said sensing means.

19. A system according to claim 18, wherein said sensing means is operable to monitor a recent history of the received signal level and wherein said power control means is operable to reduce the power output of said generating means in dependence upon said recent history.

20. A system according to claim 19, wherein said sensing means is operable to sense the level of the reflected signal at regular intervals and wherein said power control means is operable to reduce the power output of said generating means if the change in signal level between sensing intervals exceeds a predetermined threshold.

21. A system according to any preceding claim, wherein said control means comprises one or more stepper motors for controlling said steering means.

25

26

22. A system according to any preceding claim, wherein said first signalling device further comprises focussing means for focussing the received optical signal onto said reflecting means.

23. A system according to claim 22, wherein said focussing means comprises a telecentric lens and wherein said reflecting means is located substantially at the focal plane of said lens.

24. A system according to claim 23, wherein said telecentric lens is a wide angled telecentric lens.

25. A system according to any of claims 22 to 24, wherein said modulating means is transmissive and is located between said focussing means and said reflecting means.

26. A system according to any preceding claim, wherein said modulating means and said reflecting means are collocated.

27. A system according to any of claims 1 to 25, wherein said modulating means and said reflecting means are separate elements.

27

28. A system according to any preceding claim, wherein said first signalling device comprises a plurality of modulating and reflecting means for modulating and reflecting optical signals received from a plurality of second signalling devices.

29. A system according to claim 28, wherein said plurality of modulating and reflecting means are arranged in an array.

30. A system according to claim 29, wherein said plurality of modulating and reflecting means are arranged in a regular array.

31. A system according to claim 30, wherein said plurality of modulating and reflecting means are arranged in a two dimensional array.

32. A system according to any preceding claim, wherein said reflecting means comprises a retro-reflector.

33. A system according to any preceding claim, wherein said modulating means is operable to modulate at least one of the amplitude, phase, frequency or polarisation of the received signal.

34. A system according to any preceding claim, wherein said modulating means comprises a quantum confined stark effect device.

5 35. A system according to any preceding claim, wherein said second signalling device is operable to transmit a message to said first signalling device and wherein said first signalling device comprises means for retrieving the message from the received signal.

10 36. A system according to any preceding claim, wherein said generating means comprises a laser, a laser diode or a light emitting diode.

15 37. A system according to any preceding claim, wherein said second signalling device further comprises an optical beam expander for increasing the diameter of the optical signal output towards said first signalling device.

20 38. A second signalling device comprising: means for generating an optical signal; means for outputting the optical signal towards a first signalling device; means for receiving a reflected optical signal from said first signalling device carrying modulation data; and means for

25

retrieving the modulation data from said reflected signal;

characterised in that said second signalling device further comprises:

means for controllably steering the optical signal generated by said generating means towards said first signalling device;

means for sensing the signal strength of the reflected signal; and

means for controlling said steering means in dependence upon the sensed signal strength.

39. A second signalling device comprising the technical second signalling device features of any of claims 1 to 37.

40. A signalling kit comprising one or more first signalling devices and one or more second signalling devices according to claim 38 or 39.

41. An optical signalling method using first and second signalling devices, the method comprising the steps of:  
at the first signalling device: receiving an optical signal transmitted from said second signalling device;  
modulating the received optical signal with modulation

30

data for the second signalling device; and reflecting the received signal back to the second signalling device; and

at the second signalling device: generating an optical signal; outputting the optical signal towards said first signalling device; receiving the reflected optical signal from said first signalling device carrying said modulation data; and retrieving the modulation data from said reflected signal;

characterised by the following steps performed at the second signalling device:

controllably steering the optical signal generated in said generating step towards said first signalling device;

sensing the signal strength of the reflected signal;

and

controlling said steering step in dependence upon the sensed signal strength.

42. A retro-reflecting optical communications system comprising an optical source end and a reflecting end, characterised in that the source end comprises:

means for controllably steering a generated optical signal towards said first signalling device;

means for sensing the signal strength of a reflected signal received back from said reflecting end; and



means for controlling said steering means in dependence upon the sensed signal strength.

43. An optical signalling system comprising first and second signalling devices,

the first signalling device comprising means for receiving an optical signal transmitted from said second signalling device; and means for modulating the received optical signal with modulation data for the second signalling device and for reflecting the received signal back to the second signalling device; and

the second signalling device comprising: means for generating an optical signal at a first power level; means for outputting the optical signal towards said first signalling device; means for receiving the reflected optical signal from said first signalling device carrying said modulation data; and means for retrieving the modulation data from said reflected signal;

characterised in that said second signalling device further comprises:

means for sensing the signal strength of the reflected signal; and

power control means for reducing the power output of said generating means to a second lower power level in

dependence upon the sensed signal strength.

44. A system according to claim 43, wherein said sensing means is operable to monitor a recent history of the received signal level and wherein said power control means is operable to reduce the power output of said generating means in dependence upon said recent history.

45. A system according to claim 44, wherein said sensing means is operable to sense the level of the reflected signal at regular intervals and wherein said power control means is operable to reduce the power output of said generating means if the change in signal level between sensing intervals exceeds a predetermined threshold.


46. A data distribution system comprising one or more signalling systems according to any of claims 1 to 37 or 43 to 45.

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number  
WO 01/05072 A1


- (51) International Patent Classification: H04B 10/26. 10/10, 10/207
- (21) International Application Number: PCT/GB00/02633
- (22) International Filing Date: 10 July 2000 (10.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9916081.4 8 July 1999 (08.07.1999) GB  
9916082.2 8 July 1999 (08.07.1999) GB
- (71) Applicant (for all designated States except US): SCIENTIFIC GENERICS LIMITED (GB/GB); Harston Mill, Harston, Cambridgeshire CB2 5NH (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GREEN, Alan, Edward (GB/GB); Scientific Generics Limited, Harston Mill, Harston, Cambridgeshire CB2 5NH (GB). MORRISON, Euan (GB/GB); Scientific Generics Limited, Harston Mill, Harston, Cambridgeshire CB2 5NH (GB).
- (54) Title: SIGNALLING SYSTEM
- (74) Agents: BERESFORD, Keith, Denis, Lewis et al.; Beresford & Co, 2-5 Warwick Court, High Holborn, London WC1R 5DH (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guideance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

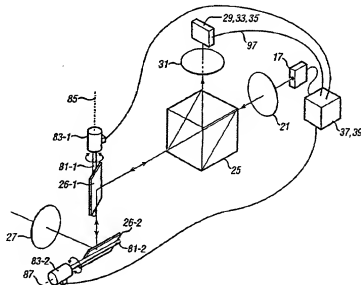


- (57) Abstract: An optical signalling system is provided comprising first and second signalling devices. The first signalling device comprises a retro-reflector and the second signalling device comprises a light source for transmitting light towards the retro-reflector. The second signalling device also includes means for controllably steering the optical signal towards the first signalling device, means for sensing the signal strength of the reflected signal; and means for controlling the steering means in dependence upon the sensed signal strength. The steering means may steer the beam using reflective, refractive or diffractive techniques.

WO 01/05072 A1

200507-2500001

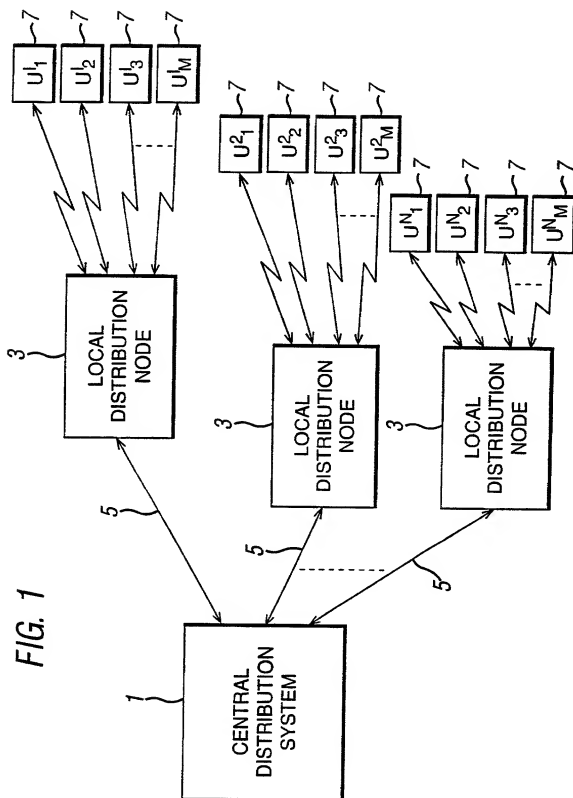

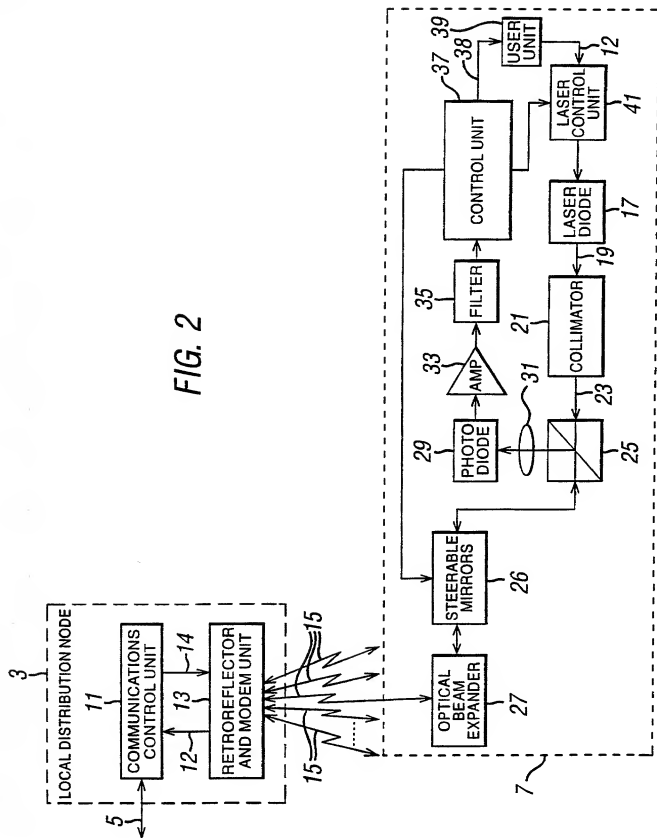

3/7

FIG. 3



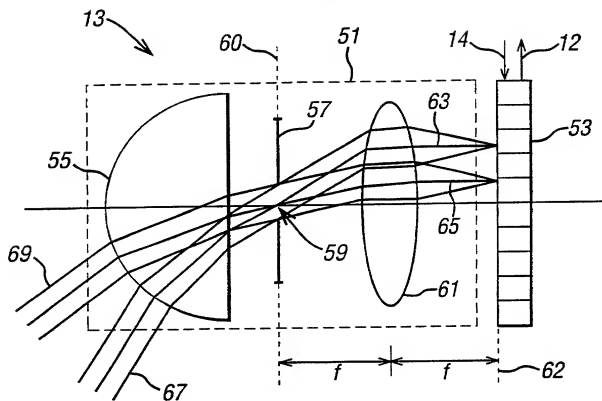


FIG. 4

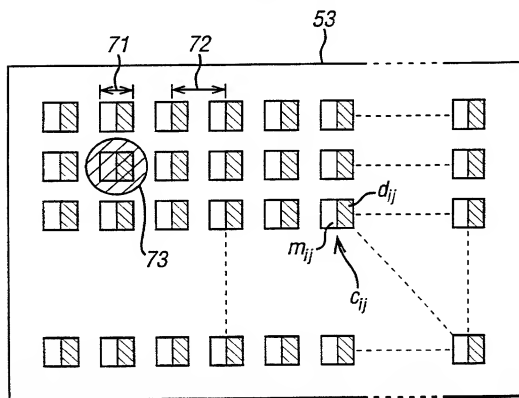

4/7

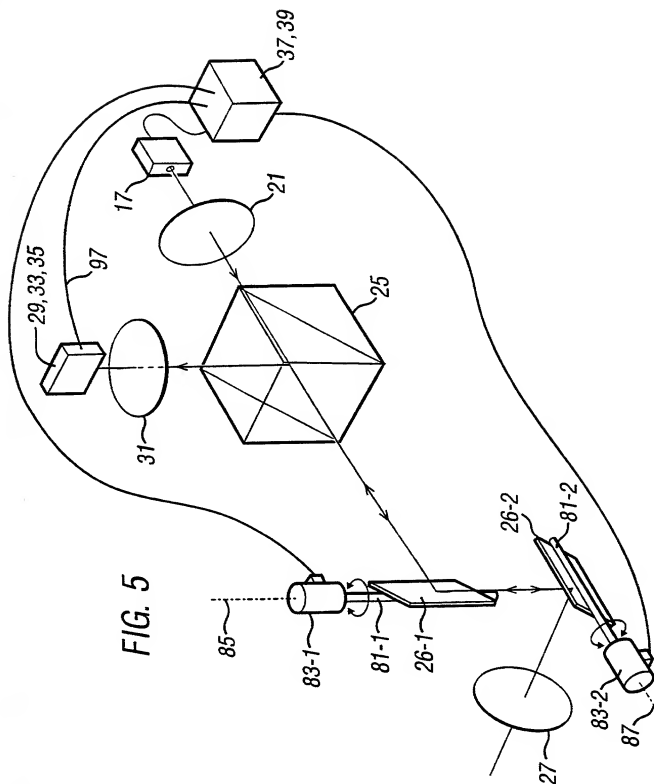

5/7

FIG. 6



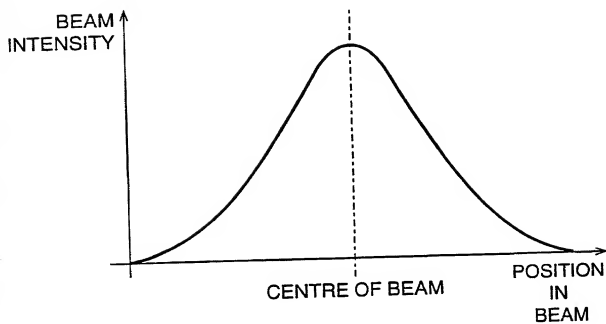




FIG. 7

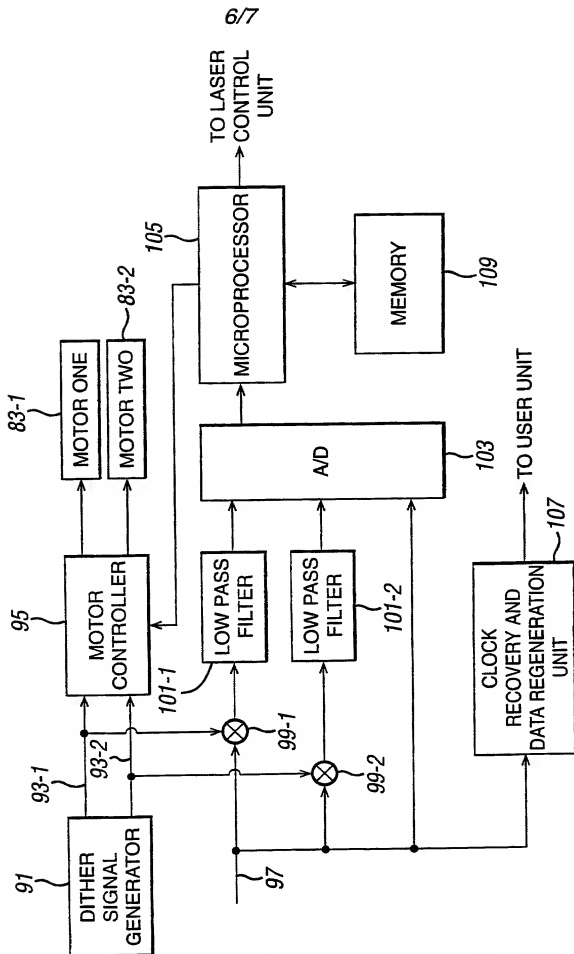

7/7

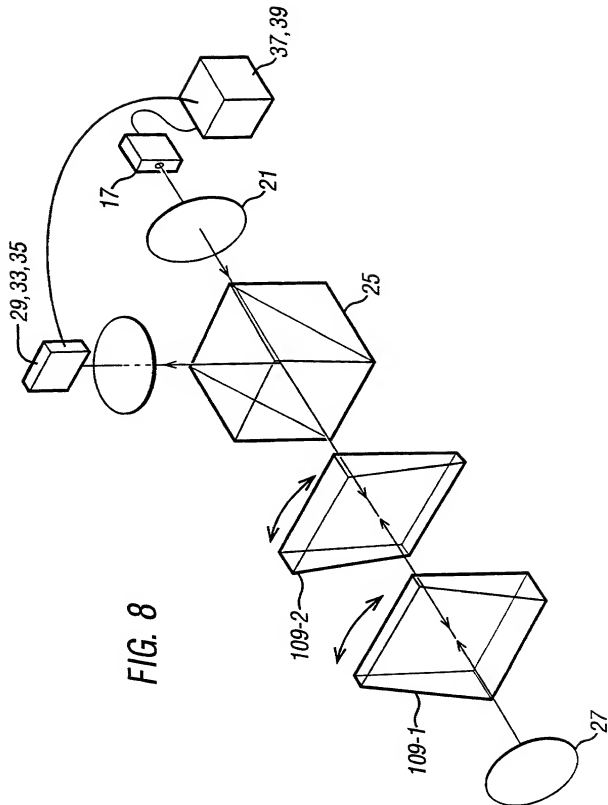

# DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

## SIGNALLING SYSTEM

the specification of which

☐ is attached and/or

☒ was filed on January 8, 2002 as United States Application Serial No. 10/030,357 and was amended on January 8, 2002. or

☒ PCT International Application No. PCT/GB/00/02633, filed July 10, 2000.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT international application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT international application(s) having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
Great Britain	9916081.4	July 8, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
Great Britain	9916082.2	July 8, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Application Number	Date of Filing

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., CUSTOMER NUMBER 22,852** Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Heffter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor,

Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Thomas W. Banks, Reg. No. 32,719; Christopher P. Isaac, Reg. No. 32,616; Bryan C. Diner, Reg. No. 32,409; M. Paul Barker, Reg. No. 32,013; Andrew Chanho Sonu, Reg. No. 33,457; David S. Forman, Reg. No. 33,694; Vincent P. Kovalick, Reg. No. 32,867; James W. Edmondson, Reg. No. 33,871; Michael R. McGurk, Reg. No. 32,045; Joann M. Neth, Reg. No. 36,363; Gerson S. Panitch, Reg. No. 33,751; Cheri M. Taylor, Reg. No. 33,216; Charles E. Van Horn, Reg. No. 40,266; Linda A. Wadler, Reg. No. 33,218; Jeffrey A. Berkowitz, Reg. No. 36,743; Michael R. Kelly, Reg. No. 33,921; James B. Monroe, Reg. No. 33,971; Doris Johnson Hines, Reg. No. 34,629; Allen R. Jensen, Reg. No. 28,224; Lori Ann Johnson, Reg. No. 34,498; and David A. Manspeizer, Reg. No. 37,540 and . Please address all correspondence to **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.**, 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor HSD Alan Edward Green	Inventor's Signature A. Green	Date 25/3/02
Residence Cambridgeshire, United Kingdom GAX	Citizenship Great Britain	
Post Office Address QUANTUMBEAM LIMITED Abbey Barns, Duxford Road, Ickleton Cambridgeshire CB10 1SX, United Kingdom		
Full Name of Second Inventor 208 Brian MORRISON	Inventor's Signature E. Morrison	Date 25/3/02
Residence Cambridgeshire, United Kingdom GAX	Citizenship Great Britain	
Post Office Address QUANTUMBEAM LIMITED Abbey Barns, Duxford Road, Ickleton Cambridgeshire CB10 1SX, United Kingdom		